

25.0 A Single-Phase Glass Passivated Bridge Rectifiers

Rectifier Reverse Voltage 50 to 1000V

Features

- Mounting Hole For #8 Screw
- Plastic Case With Metal Bottom
- Any Mounting Position
- Surge Rating Of 300 Amps


Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C

ZENIVO Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MP2505	MP25005	50V	35V	50V
MP251	MP2501	100V	70V	100V
MP252	MP2502	200V	140V	200V
MP254	MP2504	400V	280V	400V
MP256	MP2506	600V	420V	600V
MP258	MP2508	800V	560V	800V
MP2510	MP2510	1000v	700V	1000v

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	25.0A	$T_C = 55^\circ C$
Peak Forward Surge Current	I_{FSM}	300A	8.3ms, half sine
Maximum Forward Voltage Drop Per Element	V_F	1.1V	$I_{FM} = 12.5A$ per element; $T_J = 25^\circ C$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	5µA 500uA	$T_J = 25^\circ C$ $T_J = 125^\circ C$
$I^2 t$ Rating for Fusing $t < 8.3mS$	$I^2 t$	375	$A^2 S$

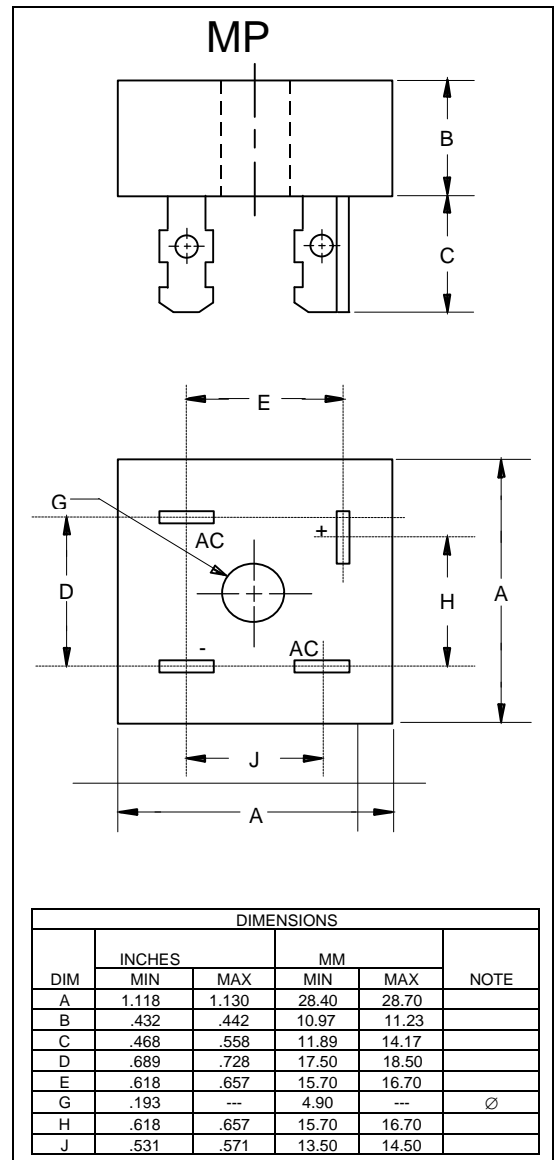


*Pulse test: Pulse width 300 µsec, Duty cycle 1%

25.0 A Single-Phase Glass Passivated Bridge Rectifiers


Rectifier Reverse Voltage 50 to 1000V

Figure 1
Typical Forward Characteristics

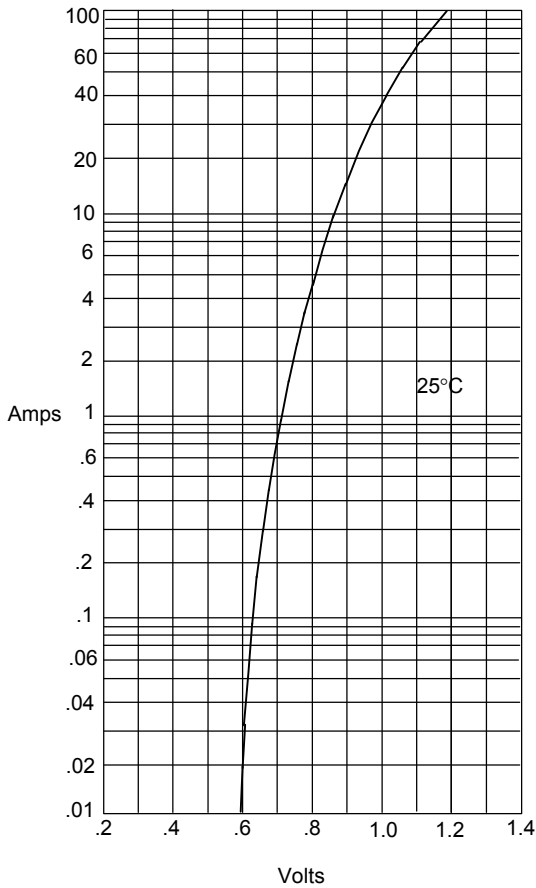


Instantaneous Forward Current - Amperes *versus*
Instantaneous Forward Voltage - Volts

Figure 2
Typical Reverse Characteristics

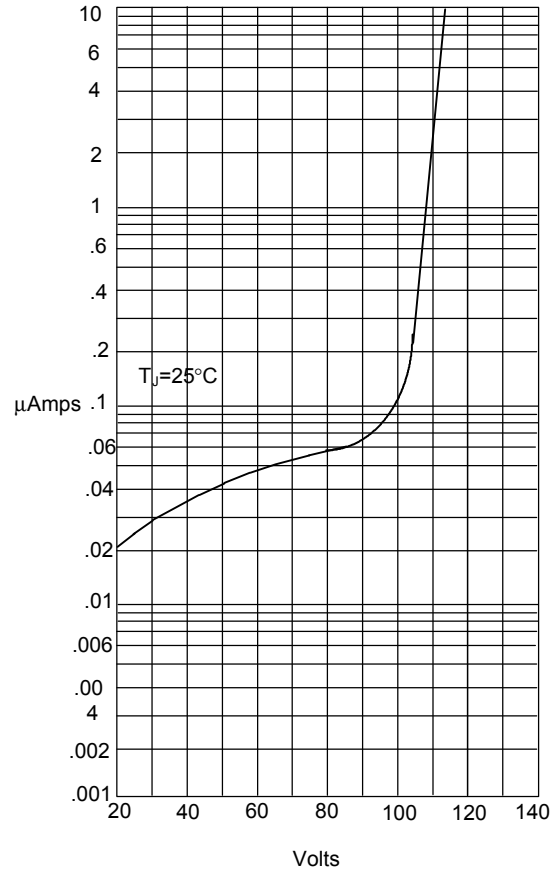


Instantaneous Reverse Leakage Current - MicroAmperes *versus*
Percent Of Rated Peak Reverse Voltage - Volts

Figure 3
Forward Derating Curve

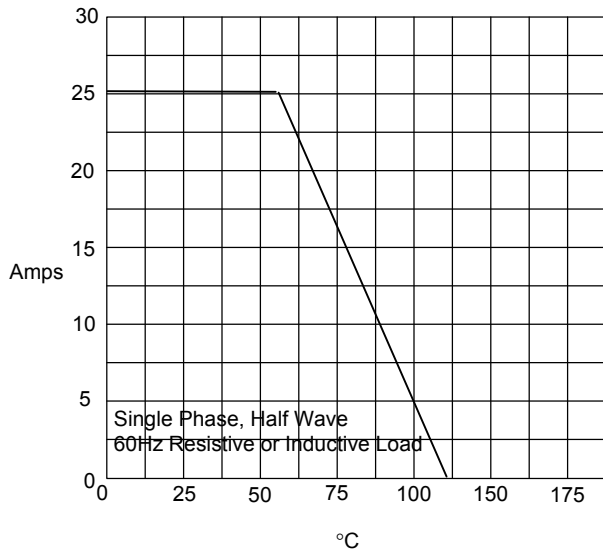

Average Forward Rectified Current - Amperes *versus*
Case Temperature - °C

Figure 4
Peak Forward Surge Current

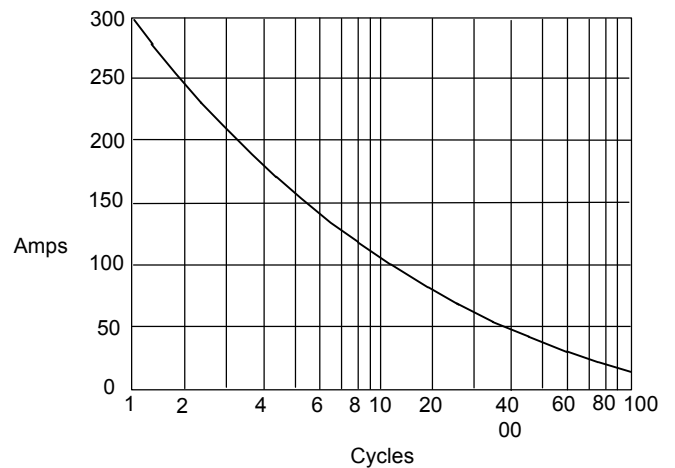

Peak Forward Surge Current - Amperes *versus*
Number Of Cycles At 60Hz - Cycles