

25.0 A Single-Phase Glass Passivated Bridge Rectifiers

Rectifier Reverse Voltage 50 to 1000V

Features

- Mounting:Hole for #10 Screw
 - Plastic Case with Metal Bottom
 - Any Mounting Position
 - Surge Rating Of 300 Amps
 - Case to Terminal Isolation Voltage 2500V
 - Halogen free available upon request by adding suffix "-HF"
 - Epoxy meets UL 94 V-0 flammability rating
 - Moisture Sensitivity Level 1
-
- Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix designates

Compliant. See ordering information)

Maximum Ratings


- Mounting Torque: 2.0 N.m, Tolerance:+/-10%
- Operating Temperature: -55°C to +125°C
- Storage Temperature: -55°C to +150°C
- UL Recognized File # E165989

ZENIVO Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MP2505W	MP2505W	50V	35V	50V
MP251W	MP251W	100V	70V	100V
MP252W	MP252W	200V	140V	200V
MP254W	MP254W	400V	280V	400V
M P256W	MP256W	600V	420V	600V
M P258W	MP258W	800V	560V	800V
MP2510W	MP2510W	1000V	700V	1000V

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	25.0A	$T_C = 55^\circ C$
Peak Forward Surge Current	I_{FSM}	300A	8.3ms, half sine
Maximum Forward Voltage Drop Per Element	V_F	1.1V	$I_{FM} = 12.5A$ per element; $T_J = 25^\circ C$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	5μA 500uA	$T_J = 25^\circ C$ $T_J = 125^\circ C$


Notes: 1. High Temperature Solder Exemption Applied, see EU Directive Annex Notes 7

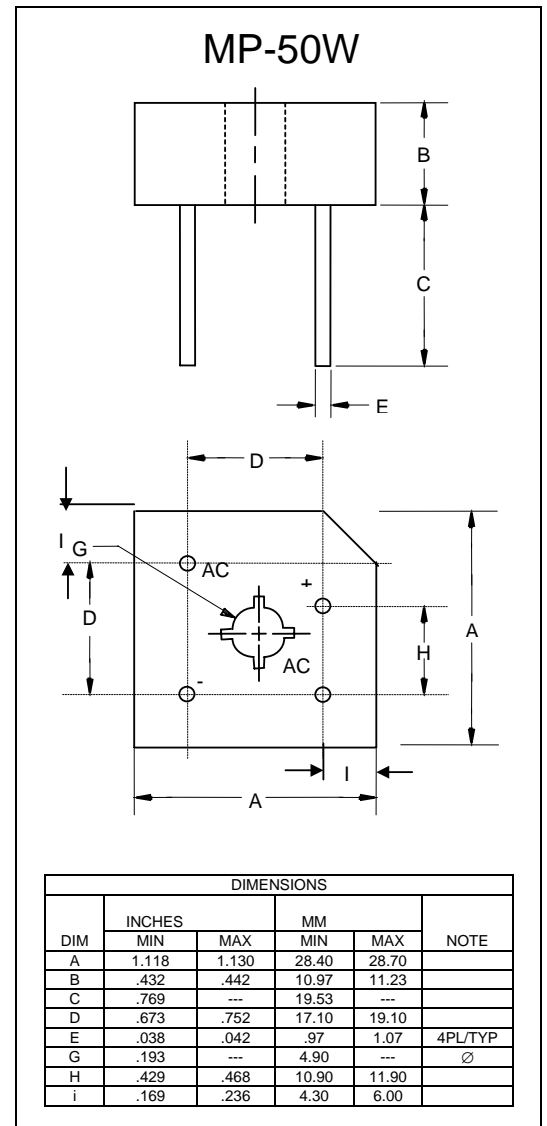

25.0 A Single-Phase Glass Passivated Bridge Rectifiers


Rectifier Reverse Voltage 50 to 1000V

Figure 1
Typical Forward Characteristics

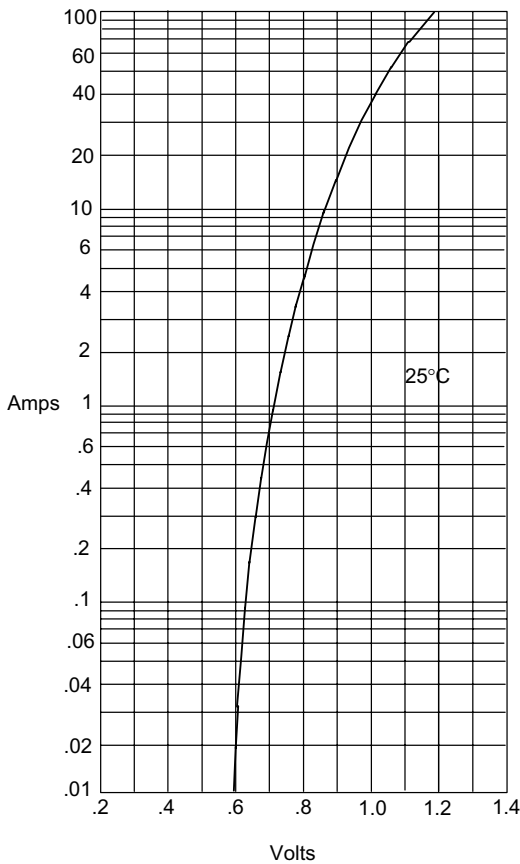


Instantaneous Forward Current - Amperes *versus*
Instantaneous Forward Voltage - Volts

Figure 2
Typical Reverse Characteristics

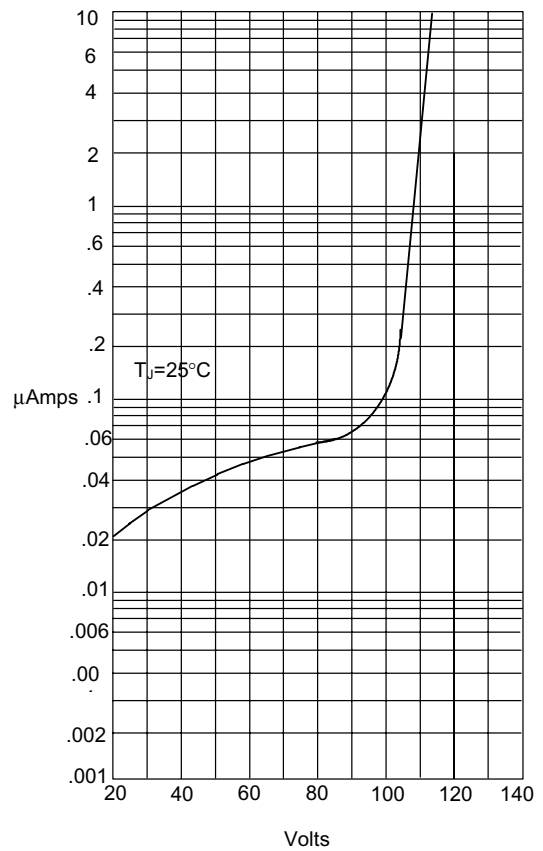


Instantaneous Reverse Leakage Current - MicroAmperes *versus*
Percent Of Rated Peak Reverse Voltage - Volts

Figure 3
Forward Derating Curve

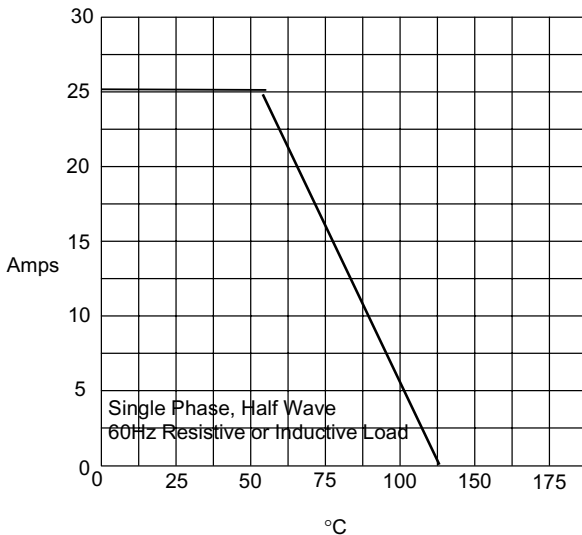

Average Forward Rectified Current - Amperes *versus*
Case Temperature - °C

Figure 4
Peak Forward Surge Current

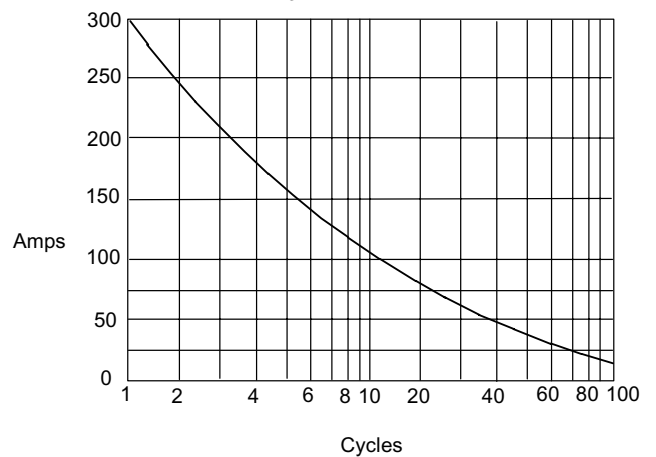

Peak Forward Surge Current - Amperes *versus*
Number Of Cycles At 60Hz - Cycles